ON Semiconductor

Is Now

Onsemi

To learn more about onsemi[™], please visit our website at <u>www.onsemi.com</u>

onsemi and ONSEMI. and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product factures, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and asfety requirements or standards, regardless of any support or applications information provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or by customer's technical experts. onsemi products and actal performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use onsemi products for any such unintended or unauthorized application, Buyer shall indemnify and hold onsemi and its officers, employees, subsidiari



Is Now Part of

ON Semiconductor®

To learn more about ON Semiconductor, please visit our website at <u>www.onsemi.com</u>

Please note: As part of the Fairchild Semiconductor integration, some of the Fairchild orderable part numbers will need to change in order to meet ON Semiconductor's system requirements. Since the ON Semiconductor product management systems do not have the ability to manage part nomenclature that utilizes an underscore (_), the underscore (_) in the Fairchild part numbers will be changed to a dash (-). This document may contain device numbers with an underscore (_). Please check the ON Semiconductor website to verify the updated device numbers. The most current and up-to-date ordering information can be found at www.onsemi.com. Please email any questions regarding the system integration to Fairchild_questions@onsemi.com.

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor data sheets and/or specifications can and do vary in different applications and safety requirements or standards, regardless of any support or application provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or unavteries, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out or i, directly or indirectly, any claim of personal injury or death associated with such unintended or unauth



LM2903,LM393/LM393A,LM293A **Dual Differential Comparator**


Features




- Dual Supply Operation: $\pm 1V$ to $\pm 18V$ •
- Allow Comparison of Voltages Near Ground Potential •
- Low Current Drain 800µA Typ.
- •
- Low Input Bias Current 25nA Typ.
- •
- •

Description

The LM2903, LM393/LM393A, LM293A consist of two independent voltage comparators designed to operate from a single power supply over a wide voltage range.

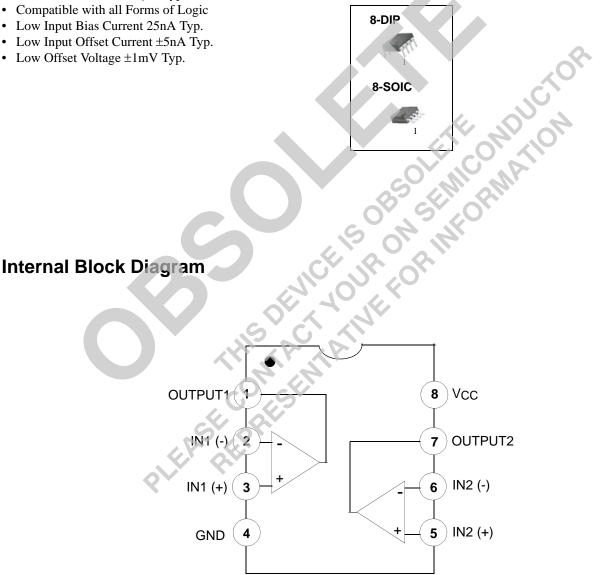

Schematic Diagram

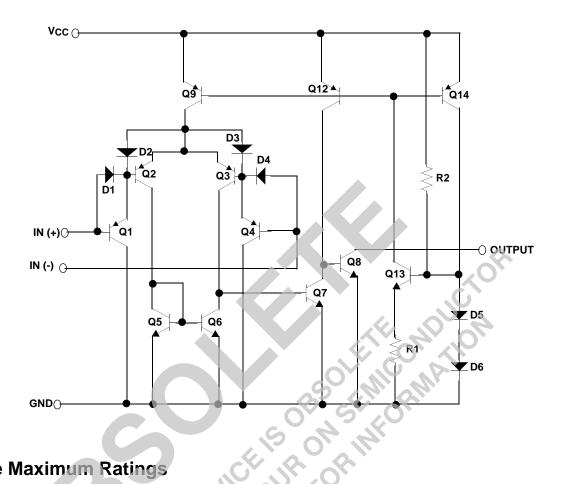

Absolute Maximum Ratings

| Parameter | Symbol | Value | Unit |
|---|------------------|------------------------------------|------|
| Power Supply Voltage | Vcc | ±18 or 36 | V |
| Differential Input Voltage | VI(DIFF) | 36 | V |
| Input Voltage | VI | -0.3 to +36 | V |
| Output Short Circuit to GND | | Continuous | - |
| Power Dissipation, T _a = 25°C 8-DIP 8-SOIC | PD | 1040 480 | mW |
| Operating Temperature LM393/LM393A LM2903 LM293A | TOPR | 0 ~ +70 -40 ~ +105 -25 ~ +85 | °C |
| Storage Temperature | T _{STG} | -65 ~ +150 | °C |

Thermal Data

| Parameter | Symbol | Value | Unit |
|---|------------------|------------|------|
| Thermal Resistance Junction-Ambient Max. 8-DIP 8-SOIC | R _{θja} | 120 260 | °C/W |

Electrical Characteristics

(V_{CC} = 5V, T_A = 25°C, unless otherwise specified)

| Symbol | Symbol Conditions | | LM293A/LM393A | | | LM393 | | | Unit | |
|--------------------------|--|---|--|--|---|---|---|--|--|--|
| Parameter Symbol | | Conditions | | Тур. | Max. | Min. | Тур. | Max. | Unit | |
| Vio | VO(P) =1.4V, RS = 0Ω | | - | ±1 | ±2 | - | ±1 | ±5 | mV | |
| VIO | VCM= 0 to 1.5V | Note1 | - | - | ±4.0 | - | - | ±9.0 | mv | |
| Input Offset Current IIO | | | - | ±5 | ±50 | - | ±5 | ±50 | nA | |
| 10 | | Note1 | - | - | ±150 | - | - | ±150 | | |
| Input Bias Current IBIAS | | | - | 65 | 250 | - | 65 | 250 | nA | |
| IDIAS | | Note1 | - | - | 400 | - | - | 400 | | |
| VI(R) | | | 0 | - | VCC -1.5 | 0 | - | VCC -1.5 | V | |
| Ī | | Note1 | 0 | - | Vcc-2 | 0 | 5 | Vcc-2 | | |
| | $R_L = \infty$, $V_{CC} = 5$ | 5V | - | 0.6 | 1 | - | 0.6 | 1 | mA | |
| | RL = ∞, VCC = 3 | 0V | - | 0.8 | 2.5 | -0 | 0.8 | 2.5 | | |
| Gv | / | | 50 | 200 | | 50 | 200 | - | V/mV | |
| TLRES | | | 5 | 350 | CO. | A | 350 | - | nS | |
| TRES | V _{RL} =5∨, R _L =5 | .1kΩ | | 1.4 | - | - | 1.4 | - | μS | |
| ISINK | $V_{I(-)} \ge 1V, V_{I(+)} = V_{O(P)} \le 1.5V$ | =0V, | 6 | 18 | - | 6 | 18 | - | mA | |
| VOAT | $V_{I(-)} \ge 1 \vee, V_{I(+)} =$ | = 0V | | 160 | 400 | - | 160 | 400 | - mV | |
| VSAT | ISINK = 4mA | Note1 | <u> </u> | - | 700 | - | - | 700 | | |
| | $V_{i(-)} = 0V,$ | VO(P) = 5V | - | 0.1 | - | - | 0.1 | - | nA | |
| IO(LKG) | $V_{I(+)} = 1V$ | VO(P) = 30V | - | - | 1.0 | - | - | 1.0 | μA | |
| | VIO IIO IBIAS VI(R) ICC GV TLRES TRES | $V_{IO} \qquad \begin{array}{c} VO(P) = 1.4V, Rs \\ VCM = 0 \text{ to } 1.5V \\ \hline VCM = 0 \text{ to } 1.5V \\ \hline VCM = 0 \text{ to } 1.5V \\ \hline VI(R) \\ \hline IBIAS \\ \hline VI(R) \\ \hline ICC \\ RL = \infty, VCC = 3 \\ \hline VCC = 15V, RL \ge 3 \\ \hline VICC = 15V, RL \ge 3 \\ \hline VICC = 15V, RL \ge 3 \\ \hline VICC = 15V, RL = 5 \\ \hline RL = 5.1k\Omega \\ \hline TRES \\ VREF = 1.4V, VR \\ RL = 5.1k\Omega \\ \hline TRES \\ VREF = 5.1k\Omega \\ \hline VI(-) \ge 1V, VI(+) = 3 \\ \hline VO(P) \le 1.5V \\ \hline VSAT \\ \hline ISINK = 4mA \\ \hline VI(-) \ge 0V \\ \hline \end{array}$ | $V_{IO} \qquad \begin{array}{c} VO(P) = 1.4V, RS = 0\Omega \\ \hline VCM = 0 \text{ to } 1.5V & \text{Note1} \\ \hline VCM = 0 \text{ to } 1.5V & \text{Note1} \\ \hline \\ IO & \text{Note1} \\ \hline \\ IBIAS & \text{Note1} \\ \hline \\ IBIAS & \text{Note1} \\ \hline \\ VI(R) & & \text{Note1} \\ \hline \\ VI(R) & & \text{RL} = \infty, VCC = 5V \\ \hline \\ RL = \infty, VCC = 30V \\ \hline \\ GV & VCC = 15V, RL \ge 15k\Omega \\ (\text{for large VO(P-P)swing)} \\ \hline \\ VCC = 15V, RL \ge 15k\Omega \\ (\text{for large VO(P-P)swing)} \\ \hline \\ TLRES & VREF = 1.4V, VRL = 5V, \\ RL = 5.1k\Omega \\ \hline \\ TRES & VRL = 5V, RL = 5.1k\Omega \\ \hline \\ ISINK & \frac{VI(-) \ge 1V, VI(+) = 0V, \\ VO(P) \le 1.5V \\ \hline \\ VSAT & \frac{VI(-) \ge 1V, VI(+) = 0V}{ISINK = 4mA} & \text{Note1} \\ \hline \\ IO(LCC) & VI(-) = 0V, & \frac{VO(P) = 5V}{VO(P) = 5V} \\ \hline \end{array}$ | $\begin{tabular}{ c c c c } \hline Min. \\ \hline V_{IO} & VO(P) = 1.4V, RS = 0\Omega & - \\ \hline VCM = 0 \ to \ 1.5V & Note1 & - \\ \hline VCM = 0 \ to \ 1.5V & Note1 & - \\ \hline & Note1 & 0 \\ \hline & RL = \infty, VCC = 5V & - \\ \hline & RL = \infty, VCC = 5V & - \\ \hline & RL = \infty, VCC = 30V & - \\ \hline & RL = \infty, VCC = 30V & - \\ \hline & QV & VCC = 15V, RL \ge 15k\Omega & 50 \\ \hline & VIC = 15V, RL \ge 15k\Omega & 50 \\ \hline & VI = TTL \ Logic \ Swing & VI = 5.1k\Omega & - \\ \hline & RL = 5.1k\Omega & - \\ \hline & ISINK & VI(-) \ge 1V, VI(+) = 0V, & - \\ \hline & VSAT & VI(-) \ge 1V, VI(+) = 0V & - \\ \hline & ISINK = 4mA & Note1 & - \\ \hline & IO(IKC) & VI(-) = 0V, & VO(P) = 5V & - \\ \hline \end{tabular}$ | $\begin{tabular}{ c c c c } \hline Min. & Typ. \\ \hline \\ \hline VO(P) = 1.4V, RS = 0\Omega & - & \pm 1 \\ \hline VCM = 0 to 1.5V & Note1 & - & - \\ \hline \\ \hline IBIAS & - & - & - & - & - & - & - & - & - & $ | $\begin{tabular}{ c c c c c } \hline Min. & Typ. & Max. \\ \hline Win. & Typ. & Max. \\ \hline Vin & Vo(P) = 1.4V, RS = 0\Omega & - & \pm 1 & \pm 2 \\ \hline VcM = 0 to 1.5V & Note1 & - & \pm 4.0 \\ \hline VcM = 0 to 1.5V & Note1 & - & \pm 5 & \pm 50 \\ \hline Ilo & Note1 & - & - & \pm 150 \\ \hline Ilo & Note1 & - & - & \pm 150 \\ \hline IBIAS & & & & & & & & & & & & & & & & & & &$ | $\begin{tabular}{ c c c c c } \hline Min. & Typ. & Max. & Min. \\ \hline ViO & VO(P) = 1.4V, RS = 0\Omega & - & \pm 1 & \pm 2 & - \\ \hline VCM = 0 to 1.5V & Note1 & - & \pm 5 & \pm 50 & - \\ \hline VCM = 0 to 1.5V & Note1 & - & \pm 5 & \pm 50 & - \\ \hline ID & Note1 & - & - & \pm 150 & - \\ \hline IBIAS & Note1 & - & 65 & 250 & - \\ \hline IBIAS & Note1 & - & 65 & 250 & - \\ \hline VI(R) & Note1 & 0 & - & VCC & 0 \\ \hline VI(R) & Note1 & 0 & - & VCC & 0 \\ \hline ICC & RL = \overline{\sigma}, VCC = 5V & - & 0.6 & 1 & - \\ \hline RL = \overline{\sigma}, VCC = 30V & - & 0.8 & 2.5 & - \\ \hline GV & VCC = 15V, RL \ge 15 k\Omega & 50 & 200 & - & 50 \\ \hline GV & VCC = 15V, RL \ge 15 k\Omega & 50 & 200 & - & 50 \\ \hline TLRES & VI = TTL Logic Swing & - & 350 & - & - \\ \hline ISINK & VI = 5V, RL = 5 1 k\Omega & - & 1.4 & - & - \\ \hline ISINK & VI (-) \ge 1V, VI (+) = 0V & - & 160 & 400 & - \\ \hline VSAT & VI (-) \ge 1V, VI (+) = 0V & - & 0.1 & - & - \\ \hline IO(1KG) & VI (-) = 0V, & VO(P) = 5V & - & 0.1 & - & - \\ \hline O(1KG) & VI (-) = 0V, & VO(P) = 5V & - & 0.1 & - & - \\ \hline \end{tabular}$ | $\begin{array}{c c c c c c c c c c c c c c c c c c c $ | $\begin{array}{c c c c c c c c c c c c c c c c c c c $ | |

Electrical Characteristics (Continued)

(V_{CC} = 5V, T_A = 25°C, unless otherwise specified)

| Devementer | Cumbal | Condi | LM2903 | | | 3 | 11:0:14 | |
|---|---------------------|--|-------------|----------|------|-------------|---------|--|
| Parameter | Symbol | Conditions | | Min. | Тур. | Max. | Unit | |
| Input Offeet Veltere | Vio | VO(P) =1.4V, RS = 0 | - | ±1 | ±7 | m\/ | | |
| Input Offset Voltage | | VCM= 0 to 1.5V | Note1 | - | ±9 | ±15 | mV | |
| Input Offset Current | lio | | | - | ±5 | ±50 | nA | |
| input Onset Current | 10 | | Note1 | - | | | ПА | |
| Input Bias Current | IBIAS | | <u>_</u> | - | 65 | 250 | nA | |
| input bias ourient | IDIAS | | Note1 | - | - | 500 | | |
| Input Common Mode Voltage Range | VI(R) | | | 0 | - | Vcc -1.5 | V | |
| Voltage Hange | | | Note1 | 0 | - | Vcc-2 | | |
| Supply Current | Icc | $R_L = \infty$, $V_{CC} = 5V$ | | | 0.6 | 1 | mA | |
| | 100 | RL = ∞, VCC = 30V | | - | 1 | 2.5 | III/A | |
| Voltage Gain | Gv | VCC =15V, RL≥15kΩ (for large VO(P-P)swing) | | | 100 | - | V/mV | |
| Large Signal Response Time | TLRES | $V_I = TTL Logic Swing$ $V_{REF} = 1.4V, V_{RL} = 5V, R_L = 5.1k\Omega$ | | | 350 | - | nS | |
| Response Time | TRES | $V_{RL} = 5V, R_L = 5.1k\Omega$ | | <u> </u> | 1.5 | - | μS | |
| Output Sink Current | ISINK | $VI(-) \ge 1V, VI(+) = 0V, VO(P) \le 1.5V$ | | 6 | 16 | - | mA | |
| Output Saturation Voltage | VSAT | $V_{I(-)} \ge 1V, VI(+) = 0V$ | | | 160 | 400 | mV | |
| | | ISINK = 4mA | Note1 | - | - | 700 | | |
| Output Leakage Current | ^I O(LKG) | VI(-) = 0V, | VO(P) = 5V | - | 0.1 | - | nA | |
| Output Leakage Outrent | | VI(+) = 1V | VO(P) = 30V | - | - | 1.0 | μΑ | |
| Note1 .M393/LM393A: 0 ≤ T _A ≤ +70°C .M2903: -40 ≤ T _A ≤ +105°C .M293A : -25 ≤ T _A ≤ +85°C | SER | $V_{I(-)} = 0V,$ $V_{I(+)} = 1V$ | * | | | | | |

Note1

Typical Performance Characteristics




Figure 1. Supply Current vs Supply Voltage




Figure 3. Output Saturation Voltage vs Sink Current




Figure 5. Response Time for Various Input Overdrive-Positive Transition




Figure 2. Input Current vs Supply Voltage





Figure 4. Response Time for Various Input Overdrive-Negative Transition

Mechanical Dimensions

Package

Dimensions in millimeters

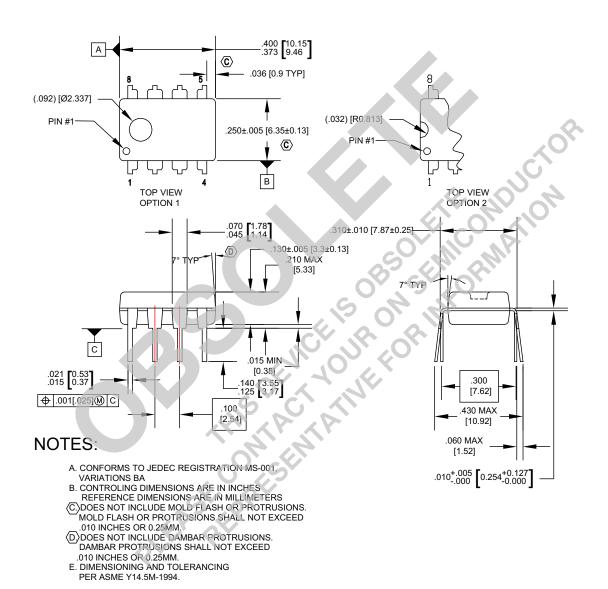


8-DIP

N08EREVG

Dimensions in millimeters

Mechanical Dimensions (Continued)

Package

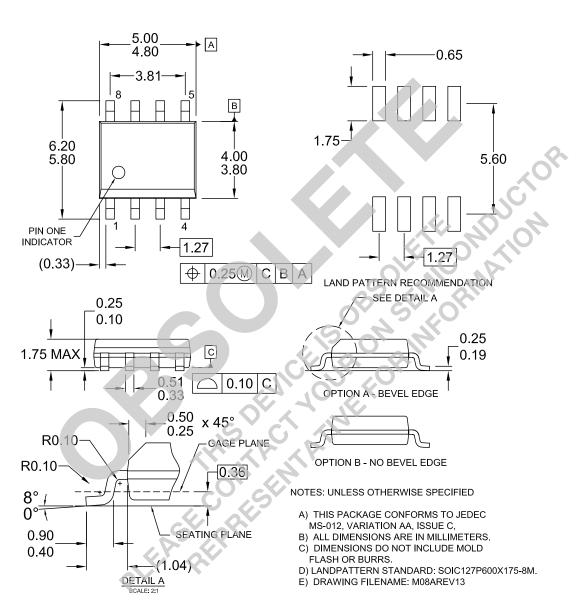

8-SOIC

Ordering Information

| Product Number | Operating Temperature | Package | Packing Method | |
|----------------|-----------------------|---------|----------------|--|
| LM393N | | 8-DIP | Rail | |
| LM393AN | | 0-DIF | Rail | |
| LM393M | 0 ~ +70°C | | Rail | |
| LM393MX | 0~+70 C | 8-SOIC | Tape & Reel | |
| LM393AM | | 0-3010 | Rail | |
| LM393AMX | | | Tape & Reel | |
| LM2903N | | 8-DIP | Rail | |
| LM2903M | -40 ~ +105°C | 8-SOIC | Rail | |
| LM2903MX | | 0-3010 | Tape & Reel | |
| LM293AN | -25 ~ +85°C | 8-DIP | Rail | |

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
- 2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

ON SEMICONDUC

www.fairchildsemi.com

ON Semiconductor and where trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <u>www.onsemi.com/site/pdf/Patent-Marking.pdf</u>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor haves against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death

50E-CTATINE FOR MICONDUCTO

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800–282–9855 Toll Free USA/Canada Europe, Middle East and Africa Technical Support:

Phone: 421 33 790 2910 Japan Customer Focus Center Phone: 81-3-5817-1050 ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative

© Semiconductor Components Industries, LLC